

CITIPORT 18 CNG



ANADOLU ISUZU


Anadolu Isuzu ist der einzige Hersteller in Europa mit
Zertifizierung gemäß "Isuzu Manufacturing Management (IMM)"

ISUZU BUS

ISUZU CITIPORT 18 CNG

TECHNICAL SPECIFICATIONS

Dimensions (mm)	
Maximum Length	18200
Maximum Width	2550
Maximum Height	3400
Wheelbase 1,2	5850, 6170
Front Overhang	2700
Rear Overhang	3480
Weights (kg)	
Gross Vehicle Weight	28975
Engine	
Model	Cummins L9NE6E320
Type	CNG Turbocharged
Number of Cylinders	6
Displacement (cc)	8880
Maximum Power (kw(PS)/rpm)	235 (320) / 2000
Maximum Torque (Nm/rpm)	1357 / 1300-1400
Emission Standard	Euro VI OBD-E
Transmission	
Model	ZF 6AP 1400 EMF
Number of Gears	6 Forward, 1 Reverse
Steering System	
	Hydraulic Automatic, Overdrive
Tyres	
Tyre Sizes	275/70 R22,5
Suspension	
Front	2 air bellows, 2 hydraulic shock absorbers
Middle, Rear	4 air bellows, 4 hydraulic shock absorbers
Anti Roll Bar	S
Kneeling System (ECAS)	S
Brake System	
Front, Middle, Rear System	Disc / Disc / Disc Full Air Brake System with EBS, ABS, ASR Dual Circuit, Electronical actuated Air Actuated Acted on Rear Axle Retarder
Parking Brake	
Auxiliary Brake	
Fuel Tank	
Gas Tanks Capacity (L)	5 x 320 lt (1600 lt) - Type 3 CNG (NGV2)
Electrical System	
Battery	24V (2x12V) - 240 Ah
Passenger Capacity*	
Maximum Passenger Capacity	145
Standard Layout	41 Seated + 104 Standing
Layout with Wheelchair	41 Seated + 1 Wheelchair + 93 Standing

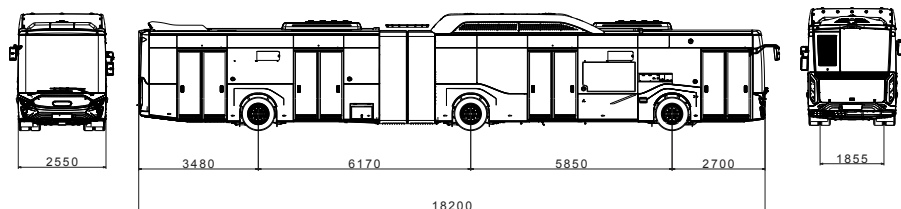

EQUIPMENTS

Heating and Ventilation	
Pre Heater	Opt
Air Conditioner	
Digital Air Conditioner	S
Safety & Driving Comfort	
Speed Limitor	S
Tachograph	S
Multiplex System	S
ASR	S
EBD	S
Bus Stop Brake (BSB)	S
Hillholder	S
Retarder	S
Spare Wheel	S
Tyre Inflation Set	S
Roof Hatch for Ventilation & Emergency Exit	S
Reverse Gear Warning Beeper	S
Engine Compartment Fire Detection and Automatic Fire Supression System	S
Fog Lamps	S (Front / Rear)
Day Time Running Lamps (DRL)	S
Locking System	S
Battery Main Switch	S
Exterior	
Metallic Paint	Opt
Side Stripe Stickers	S
Towing Device	S
Doors	
Number of Service Doors	4 Doors
Type of Service Doors	Double Wing Air Actuated Interior Movement for All Front,
Wheelchair Ramp	S
Remote Control	S
Windows	
Type	Single Piece, With Slider
Driver Window	Single Piece, Sliding And With Heater
Layers of Glass	Single Glazed (S)
Interior	
Driver Seat	
Driver's Seat	Air Actuated, Adjustable
Steering	Adjustable Steering Wheel
Side Mirrors	Electrically Controlled, Heated
Driver's Cabin	S
Driver Overhead Cabinet	O
Coathanger for The Driver	S
Passenger Compartment	
Passenger Seat Material	Cloth Ped On Plastic
Lightening & Signalization	
Interior Ceiling Lighting	S (Continuous type with LED)
Stop Buttons & Signboard	S
Digital Destination Display	Front, Rear (S)
Audio & Visual	
Camera Systems	S
Recording Device (DVR)	S
Radio System	Radio, USB, MP3, DVD Player, CD Player
Monitor / LCD Screen (Passenger Compartment)	S
Digital Clock	S
Driver Speaker	S
Announcement System for Passenger Area	S

S: Standard Opt: Optional

* Different seating variations available.

ISUZU BUS